

# Shrink Tunnel

Model:

# PP2208-48

*General purpose shrink tunnel for a wide variety of applications.*

## Available options:

Falcon Belting

Teflon Mesh Belting

Stainless Steel Metal  
Mesh Belting

High Density Rollers - Close  
Roller Spacing 1/2" Gap



The **PP2208-48 Tunnel** is a great general purpose shrink tunnel that can be used for a wide variety of applications. Can be used with shrink bands, neck bands, full body sleeves, used with shrink film, used as drying or curing tunnel etc.

## Standard Features Include:

- Fully Re-Circulating Air Chamber
- Live Roller Rod Conveyor
- Digital Temperature Control 0-400°
- Adjustable Air Velocity Control
- State-of-the-Art AC Variable Speed Drive 0-75 FPM
- Chromed Conveyor Rollers and Shaft (No Rust)
- Automatic Tunnel Cool Down with Shut Off
- 1HP Blower Motor
- Sealed Bearings on Drive and Idler Shafts
- Chamber Size 22"W x 8"H x 48"L
- Quietest Tunnel on the Market
- Heats up to 300° F in less than 15 minutes
- Thermal Overload Protection on All Motors
- Locking Casters with Leveling Screws
- Anti-Jam Safety Features on Conveyor
- 15 KW Heater Bank
- 2 year **parts** warranty

## Available Options:

- 12" or 16" Tunnel Height
- Close Roller Spacing 1/2" Gap
- Teflon Mesh Belt
- Stainless Steel Metal Mesh Belt


*The New Industry Standard for Quality and Reliability*



**DURAPAK**  
SUPPLIES

# Shrink Tunnel


**PP2208-48**

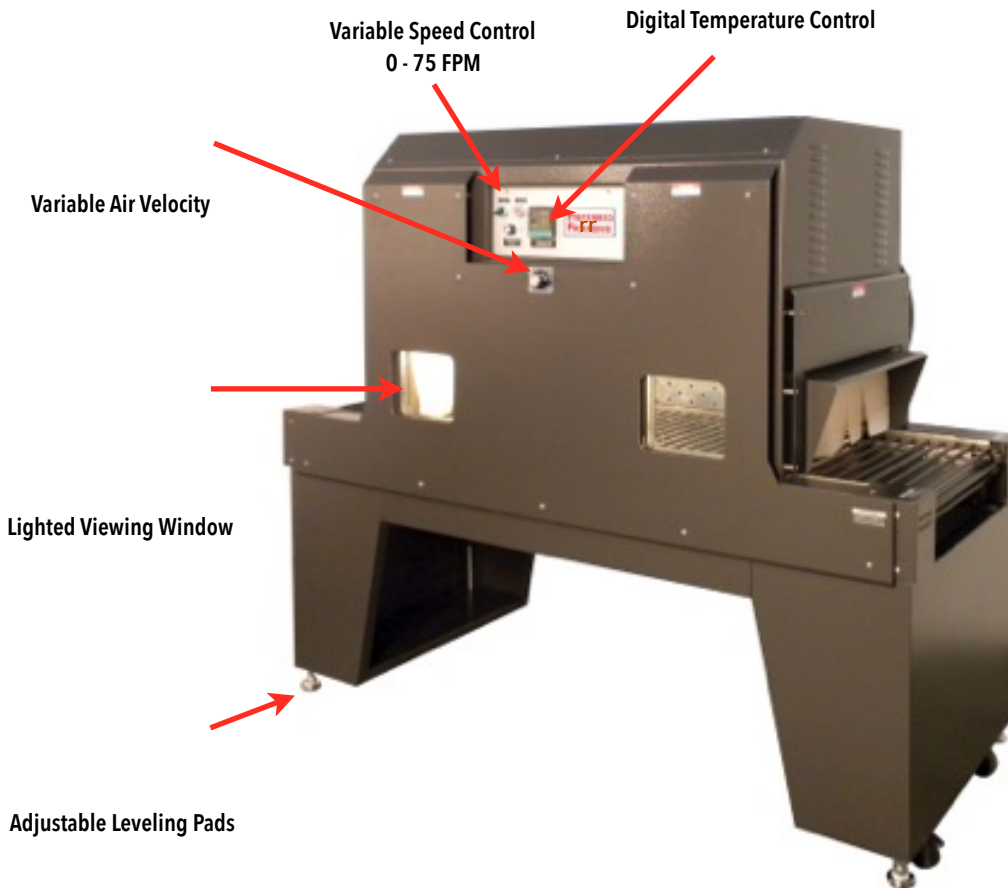

**PP2212-48 and PP2216-48**  
Available for Taller Package Sizes



\* Stainless Steel Frame  
Construction Available

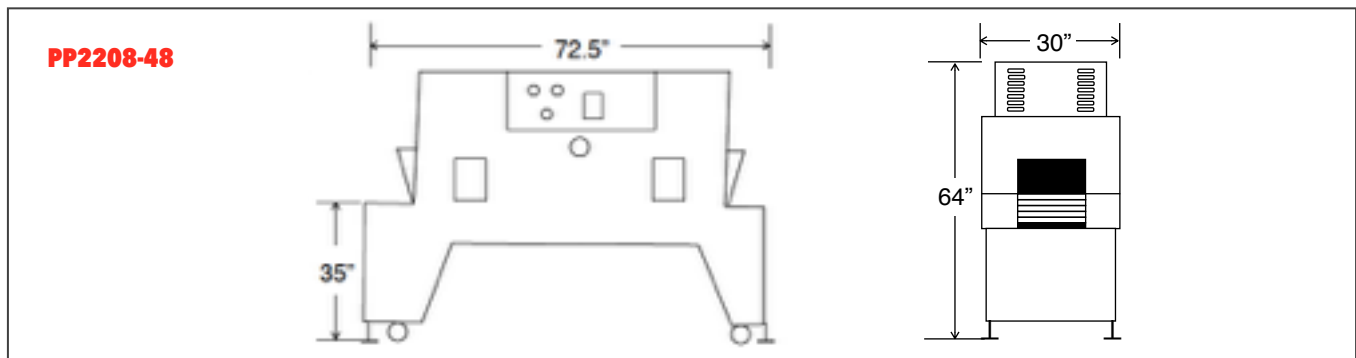

## Specifications:

MODEL	POWER			WEIGHT NET/SHIPPING	TUNNEL OPENING			SPEED	MACHINE DIMENSIONS		
	VOLTS	PHASE	AMPS		L	W	H		L	W	H
PP2208-48	220	3	50	600/840	48	22	8	0-75 FPM	72.5	30	64
PP2212-48	220	3	50	630/860	48	22	12	0-75 FPM	72.5	30	68
PP2216-48	220	3	50	660/890	48	22	16	0-75 FPM	72.5	30	72

