

General Purpose Shrink Tunnel

can be used with a wide variety of applications

Model:

PP1808-28

Available options:



Falcon Belting

Teflon Mesh Belting

Stainless Steel Metal
Mesh Belting

High Density Rollers - Close
Roller Spacing 1/2" Gap

The **PP1808-28 Shrink Tunnel** is a great general purpose shrink tunnel that can be used for a wide variety of applications. Can be used with shrink bands, neck bands, full body sleeves, used with shrink film, used as a drying or curing tunnel etc.


Standard Features of Shrink Tunnel Include:

- Fully Re-Circulating Air Chamber
- Live Roller Rod Conveyor
- Digital Temperature Control 0-400°
- Adjustable Air Velocity Control
- State-of-the-Art AC Variable Speed Drive 0-75 FPM
- Chromed Conveyor Rollers and Shaft (No Rust)
- Automatic Tunnel Cool Down with Shut Off
- 1/2 HP Blower Motor
- Sealed Bearings on Drive and Idler Shafts

- Chamber Size 18"W x 8"H x 28"L
- Quietest Tunnel on the Market
- Heats up to 300° F in less than 15 minutes
- Thermal Overload Protection on All Motors
- Locking Casters with Leveling Screws
- Anti-Jam Safety Features on Conveyor
- 7.5 KW Heater Bank
- 2 year **parts** warranty

**Optional Tunnel Height of 12" Opening also Available.*



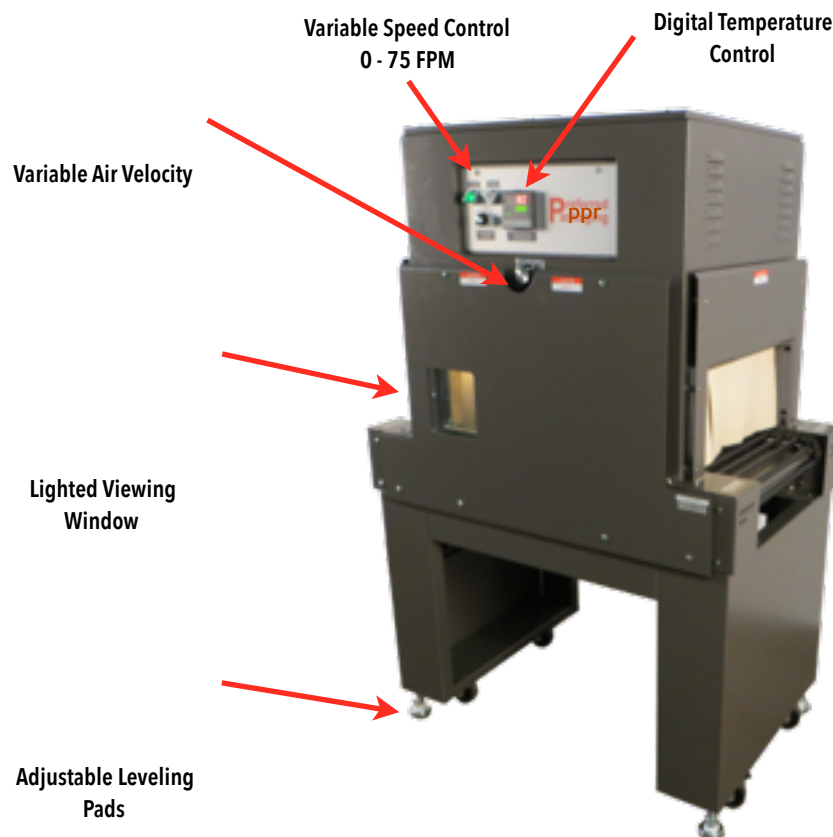

PP1812-28
Available for Taller Package Sizes



* Stainless Steel Frame Construction Available

Specifications:

MODEL	POWER			WEIGHT	TUNNEL OPENING			SPEED
	VOLTS	PHASE	AMPS		L	W	H	
PP1808-28	220	1	40	450	28	18	8	0-75 FPM
PP1812-28	220	1	40	470	28	18	12	0-75 FPM

Available Options:

- 12" Tunnel Opening
- Close Roller Spacing 1/2" Gap
- Teflon Mesh Belt
- Stainless Steel Metal Mesh Belt

